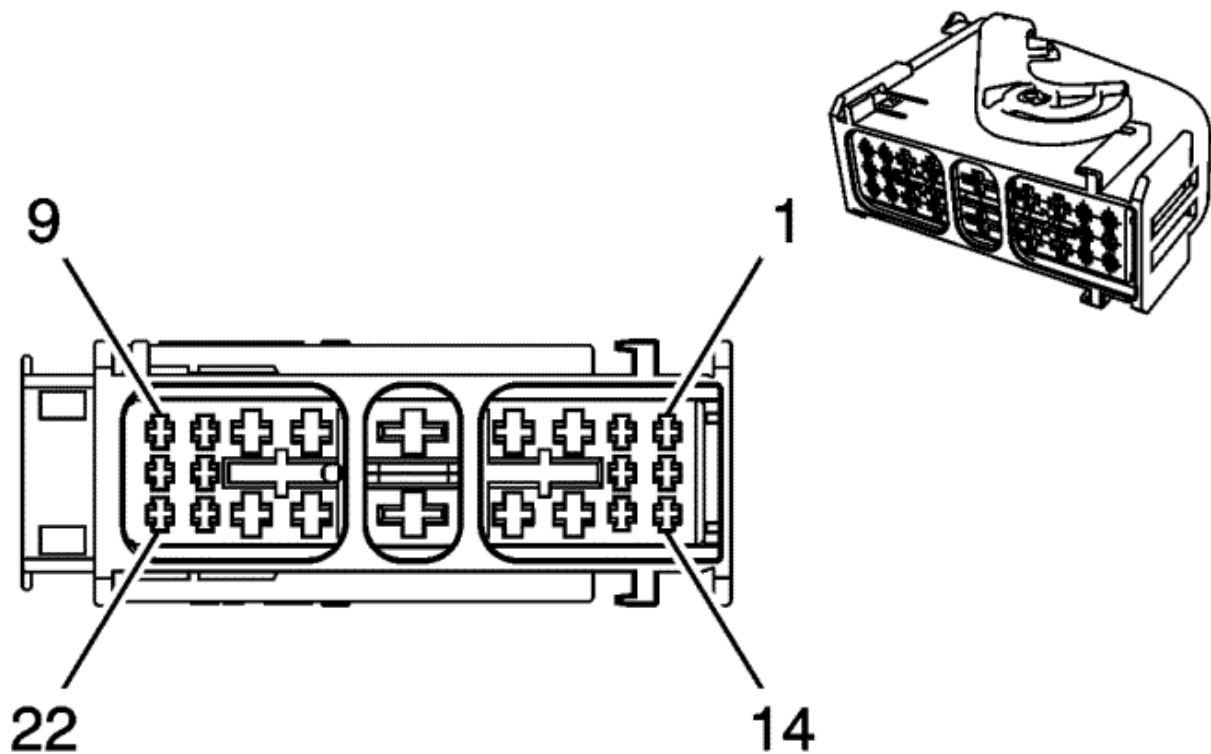


X53A Fuse Block - Rear Body X3**Connector Part Information**

- Harness Type: Body Rear
- OEM Connector: 13262030
- Service Connector: 13576559
- Description: 22-Way F 1.5/2.8/Ducon 6.3 Series (BK)

Terminal Part Information

- Terminated Lead: Pending
- Release Tool: Pending
- Diagnostic Test Probe: Pending

X53A Fuse Block - Rear Body X3

Pin	Wire	Circuit	Function
1-2	--	--	Not Used
3	1.5 RD/BK	7601	Trailer Battery Charge Supply Voltage (VQ9)
4-11	--	--	Not Used
12	0.75 VT/D-GN	639	Run/Crank Ignition 1 Voltage (VQ9)
13	0.75 VT/WH	839	Run/Crank Ignition 1 Voltage (UJN)
14-15	--	--	Not Used
16	1.5 RD/GY	1442	Battery Positive Voltage (VQ9)
17	--	--	Not Used
18	2.5 RD/VT	1940	Battery Positive Voltage (VQ9)
19-22	--	--	Not Used